


# Beltsiflex Rubberwall

## New Concept:

Developed and tested under extreme conditions, this system is a simple and effective two-part system that prevents dust, pillage and helps to reduce cleanup and maintenance costs at installations. This system can be set up in a broad variety of chute configurations only considering the height of the skirtboard, type of material conveyed and the angle of the idlers.

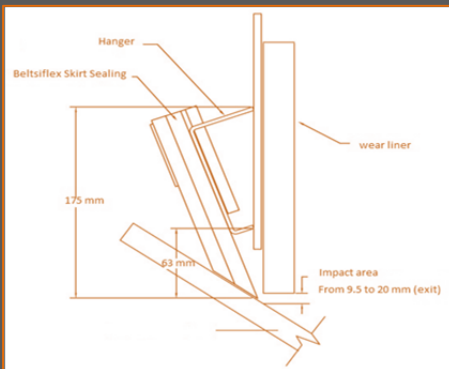

## Simple Two-parts system:



Mount the stainless steel hangers to the chutewall, insert the skirting "T" lugs into the serrated channels, and adjust the skirting to the belt. The skirting holds securely and adjusts in seconds by pushing down or tapping with a mallet. No nuts, bolts, clamps or fasteners to worry about. Quick, easy peel-away removal for maintenance.

## Great performance:

After install them in several duty hard-rock installations, the self-adjusting rubber that contours and flexes with the belt, prevents dust leakage satisfactorily. The Beltsiflex Rubberwall System is arguably the most simple and effective sealing system. The sealing strip is high quality press molded rubber that substantially outlasts conventional skirting and can be adjusted and produced in several qualities to offer long-life.

Thickness -Hardness	150 mm height	175 mm height	200 mm height	220 mm height
12mm – 40 Sh-A				
12mm – 60 Sh-A				
20mm – 40 Sh-A				
20mm – 60 Sh-A				
25mm – 40 Sh-A				
25mm – 60 Sh-A				

Model: square or bevelled  
Quality: Anti Abrasion, Heat Resistant, Oil Resistance, Flame Resistant.  
Direction: Left or Right

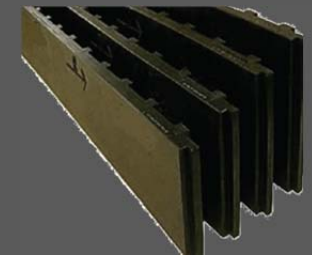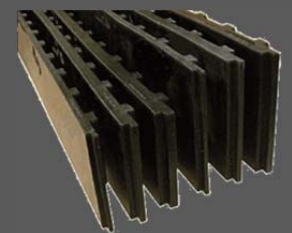

(Length of the inclination)

Hanger 50 mm	Hanger 100 mm
	45°
	60°
	70°
	80°
	90°

Our stainless steel hangers feature laser cut, serrated channels every 100mm to hold the skirt securely and allow precise adjustment, yet still allow for easy removal. Our hangers are available in several length and 5 inclinations (45,60-70 80 90°).



# Beltsiflex