


# SPOT PRESS

## (SP)

The ALMEX Spot Repair press is a superior vulcanizing press for heavy weight rubber belt maintenance.

### FEATURES:

- Signature Shaw Almex "Pressure Bag" uniform pressure system
- Custom "Extruded Plank" fast cooling system within platens
- Durable silicon heating element
- Lightweight and portable structure

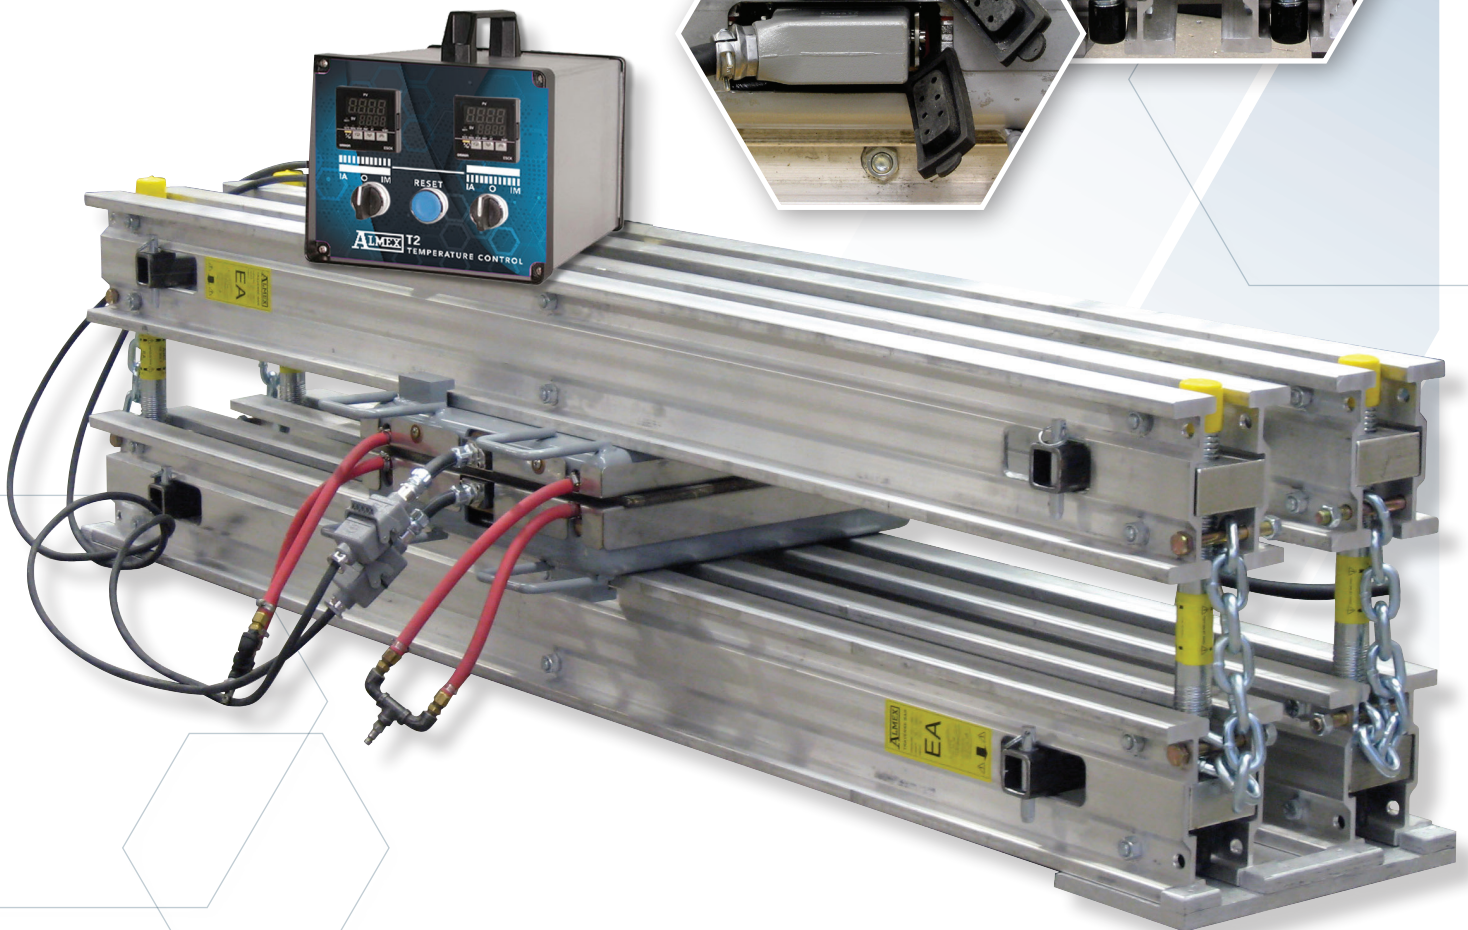

GL

Shaw Almex  
Mining Equip. (Tianjin) Co. Ltd.  
☎ +86 (22) 2388-9075

PT. Shaw Almex  
Indonesia  
☎ +61 488 780243

Shaw Almex  
Pacific Pty Ltd. Qld  
☎ 61 7 4774 2011

Shaw Almex  
Pacific Pty Ltd. WA  
☎ 61 8 9358 5860

Shaw Almex  
India PVT. Ltd.  
☎ 91-129-2274624

 **ALMEX**  
GROUP  
www.almex.com 1.800.977.5423



COMPONENT	DESCRIPTION
<b>PLATENS</b>	<ul style="list-style-type: none"> <li>Utilized innovative Almix Flexible platen constructed from extruded plank, silicone heating element and durable composite insulation. Each platen contours to the belt's irregularities, ensuring uniform results</li> <li>Maximum temperature 163 °C (325 °F)</li> <li>Available Platen Sizes: 300 mm x 300 mm (12"x12"), 500 mm x 500 mm (20" x 20")</li> </ul>
<b>TRAVERSE BARS</b>	<ul style="list-style-type: none"> <li>Welded aluminum C-Frame with handle for easy, one man handling</li> <li>Two sizes are available for use on belt widths up to 1500 mm (60") and 2000 mm (78"). Complete with platen carrying case</li> </ul>
<b>CONTROL PANEL</b>	<p><b>Suitable Controls:</b></p> <ul style="list-style-type: none"> <li>T2: Remote, maximum 40 amps total) for 230 Volt single phase operation</li> <li>T6: Remote, maximum 30 amps total for three phase operation</li> <li>T2 and T6 panels feature dual temperature control and indication systems</li> <li>An optional timer is available.</li> </ul>
<b>PRESSURE/COOLING</b>	<p><b>Suitable Pump:</b></p> <ul style="list-style-type: none"> <li>HP25MAX</li> <li>HPP-204</li> <li>Pressure available in 7 kg/cm<sup>2</sup>, 100 psi and 14 kg/cm<sup>2</sup>, 200 psi</li> <li>For pressure greater than 100 psi a fluid pressure pump and reservoir Model HPP20-4 or HP25MAX are available</li> </ul>

GL

Shaw Almix  
Mining Equip. (Tianjin) Co. Ltd.  
☎ +86 (22) 2388-9075

PT. Shaw Almix  
Indonesia  
☎ +61 488 780243

Shaw Almix  
Pacific Pty Ltd. Qld  
☎ 61 7 4774 2011

Shaw Almix  
Pacific Pty Ltd. WA  
☎ 61 8 9358 5860

Shaw Almix  
India PVT. Ltd.  
☎ 91-129-2274624